

DRYING

SINGLE POCKET DRYERS ADVANCE SR-11/14 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- MIXED FLOW - New 'optimized' system of mixed airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation
- WET CLEANING
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

CONNECTIVITY

- FagorKconnect IoT
- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- iDRY - Intelligent humidity control with new drum inlet temperature control
- Double doorglass
- Reverse door opening
- FK - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- FagorKconnect-IoT communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steam battery
- Low pressure steam battery
- Wooden packing
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | ADVANCE | SR-11/14 TP2

	UNIT.	SR-11 TP2	SR-14 TP2		
CAPACITY					
Capacity 1/18	Kg	12	15		
Capacity 1/20	Kg	11	13,5		
Hourly Output ADVANCE*	Kg/h	23-21	34-30		
Evaporation capacity ADVANCE*	l/h	14,5	15,40		
DRUM					
Ø Drum	mm	750	750		
Ø Door (load hole)	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	610		
Drum volume	l	210	270		
POWER					
Drum motor power	Kw	0,37	0,37		
Fan motor power ADVANCE	Kw	0,25	0,25		
Electric heating power ALL RANGES	Kw	12	18		
Total electric power (elec.model) ADVANCE	Kw	12,67	18,67		
Gas heating power ALL RANGES	Kw	20,51	20,51		
Total electric power (gas model) ADVANCE	Kw	0,67	0,67		
Steam heating power ALL RANGES	Kw	30	30		
Steam heating power (gas model) ADVANCE	Kw	0,67	0,67		
CONNECTIONS					
		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 10 / 40A	3 x 1,5 / 20A	4x16 / 63A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 4 / 25A	3 x 1,5 / 20A	5x10 / 32A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1074	
Net Height / Gross Height	mm	1.694 / 1.840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190	
OTHERS					
Max airflow ADVANCE	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level ADVANCE	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

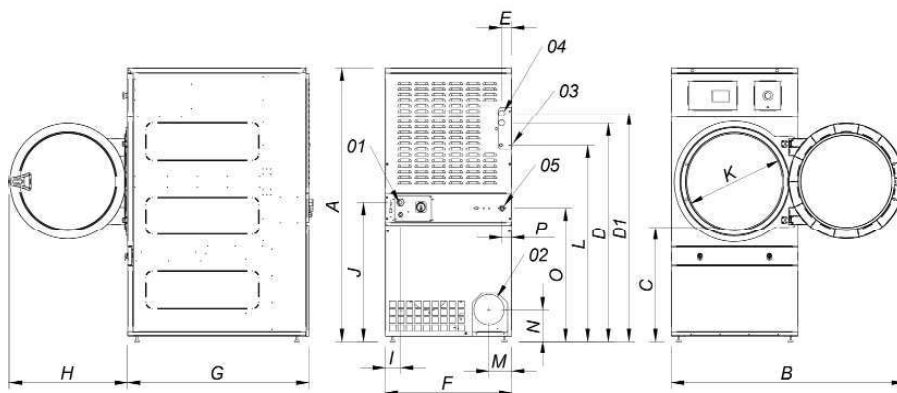

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SR-11	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
SR-14	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65